

**ALIMAK****TWIN COMBINATION HOIST****Technical Data**

CAPACITY		SCANDO 20/32	SCANDO M Combi 25
Pay-load capacity	kg	2000	2300
Erection load	kg	2000	2300
Speed 50 Hz	m/s	0.65	0.45
Max. lifting height	meter	100	100
<b>Increased lifting height on request</b>			
Erection crane capacity	kg	250	150
Safety device	type	GFD	GFD

**CAGE DIMENSIONS**

Internal width x length	meter	1.5 x 3.2	1.4 x 3.2
Internal min. height	meter	2.55	-
Door opening w x h	meter	1.49 x 2.0	-

**ELECTRICAL DATA**

Power supply range 380 – 690 V, 50 or 60 Hz, 3 Phase


At 400 V/50 Hz:

Power supply fuses	A	80	63
Rated power cont. duty	kW	3 x 7.5	2 x 7.5
Starting current	A	270	210
Power consumption	kVA	39	26

**Data at other voltages on request****WEIGHTS**

Base unit weight	kg	2870	1900*
Mast section with one rack	kg	130 – 170	
Mast section with two racks	kg	188 – 226	
Mast section length	mm	1508	1508

\*Without enclosure parts

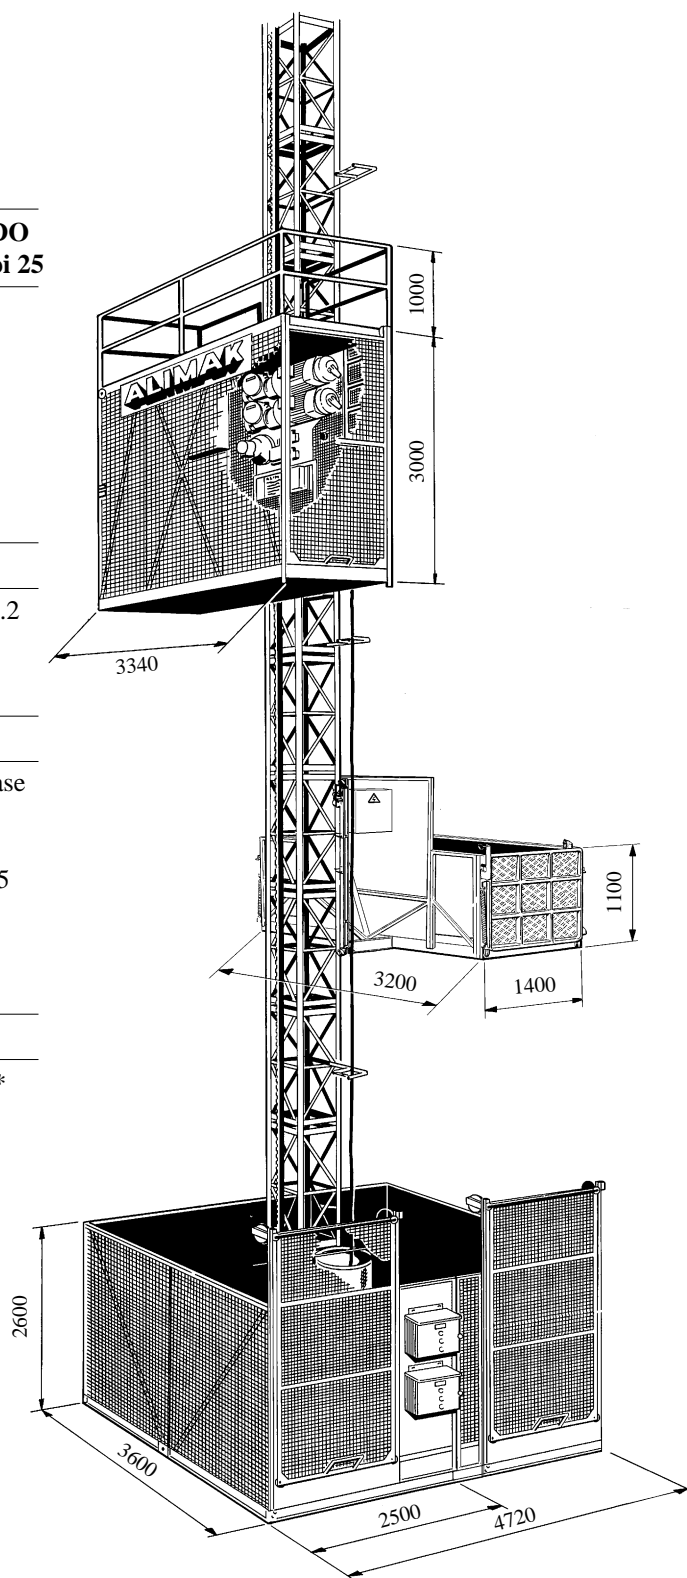



MEMBER OF THE ATLE KAROLIN GROUP

Alimak AB, P.O. Box 720, S-931 27 Skellefteå, Sweden.  
Tel. +46 910 87000. Fax +46 910 56690.  
E-mail: [info@alimak.se](mailto:info@alimak.se) Internet: <http://www.alimak.se>

Alimak have subsidiaries in: Great Britain, Germany, France, USA, Canada, Australia, Singapore, Brazil, Italy as well as in South Korea and, furthermore, 40 independent distributors around the world.

Pictures are illustrative only and do not necessarily show the configuration of products on the market at a given point in time. Products must be used in conformity with safe practice and applicable statutes, regulations, codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice.