




# ALIMAK 20/42TD "C" PASSENGER GOODS HOIST

| HOIST SPECIFICATIONS                    |                    |
|---|--------------------|
| <b>Capacity</b>                         | 2000kg (24 people) |
| <b>Internal Cage Length</b>             | 4.2m               |
| <b>Internal Cage Width</b>              | 1.5m               |
| C door opening                          |                    |
|   | 3.7m x 2.0m        |
| <b>Speed</b>                            | 40m/min            |
| <b>Voltage</b>                          | 415V 3 phase       |
| <b>Power Cont. Duty</b>                 | 3 x 7.5kW          |
| <b>Starting Current</b>                 | 310A               |
| <b>Power Consumption</b>                | 39kVA              |
| <b>Power Supply Fuses (HRC)</b>         | 80A                |
| <b>Base Unit Weight</b>                 | 3370kg             |
| <b>Max. Freestanding Landing Height</b> | 7.5m               |
| <b>Max. Tie Interval</b>                | 12m                |
| <b>Max. Tie Oversail</b>                | 9m                 |
| <b>Max. Final Landing Height</b>        | 146m               |

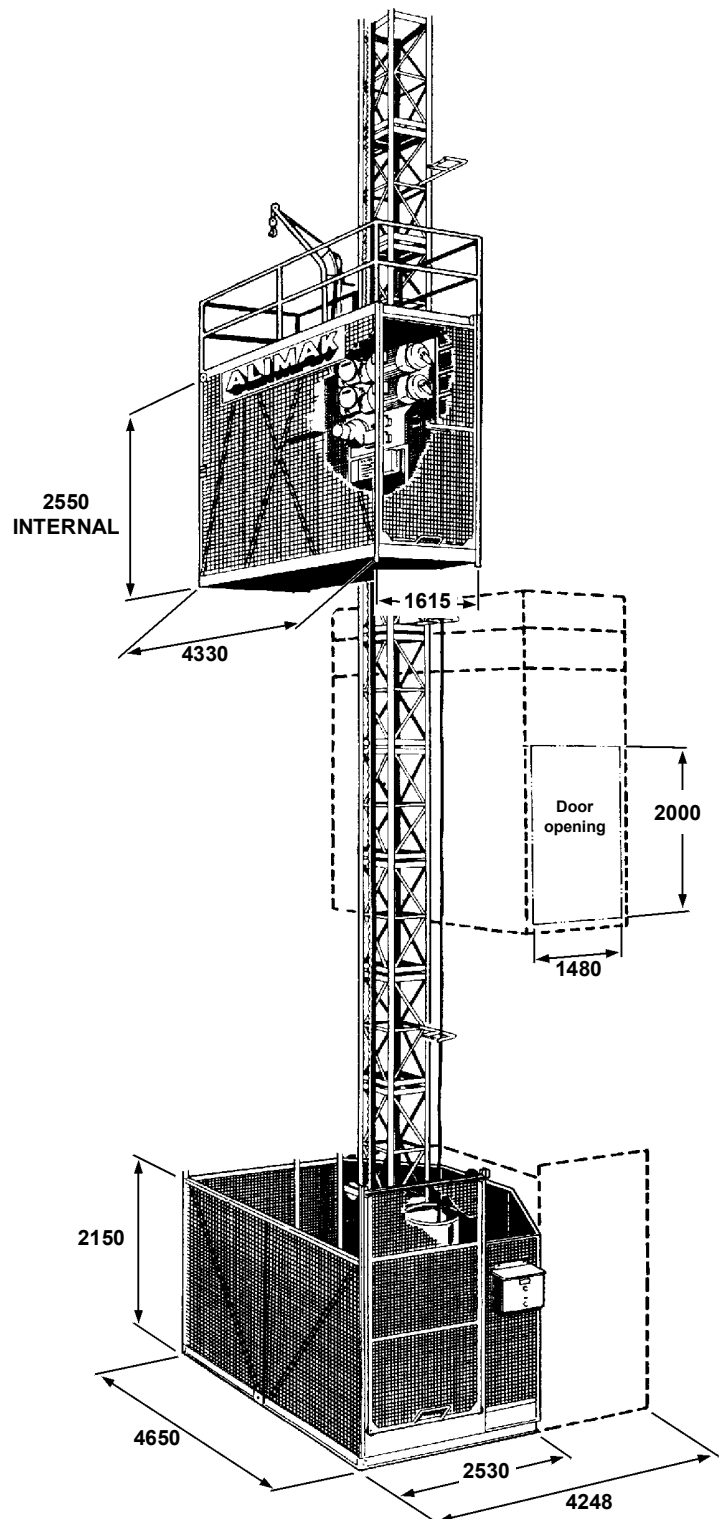

LONDON  
HOIST  
LTD

RIFLE STREET - LONDON - E14 6PB  
TEL : 0207 5384833 - FAX : 0207 5153593  
www.londonhoist.co.uk - info@londonhoist.co.uk