

ALIMAK

SCANDO M Combi 25

Technical Data

PLATFORM DIMENSIONS

Internal width x length	meter	1.4 x 2.0	1.4 x 3.0	1.4 x 3.2	1.4 x 3.7	1.4 x 4.0
-------------------------	-------	-----------	-----------	-----------	-----------	-----------

CAPACITY (with symmetrical platform configuration)

Pay-load capacity	kg	2500	2300	2300	2000	2000
Speed 50 Hz	m/s	0.45	0.45	0.45	0.45	0.45
Max. lifting height	meter	100	100	100	100	100
Increased lifting height on request						
Erection crane capacity	kg	150	150	150	150	150
Safety device	type	GFD	GFD	GFD	GFD	GFD

ELECTRICAL DATA

Power supply range 380 – 690 V,
50 or 60 Hz, 3 Phase

At 400 V/50 Hz:

Power supply fuses 63 Ampere
 Rated power 2 x 7.5 kW
 Starting current (DOL) 210 Ampere
 Power consumption 26 kVA
 Power cable guiding system Collecting basket
 (<100 m)

Data at other voltages on request

WEIGHTS


Base unit weight* 1730 kg
 Mast section with one rack 130 kg
 Mast section with two racks 154 kg
 Mast section length 1508 mm

TRANSPORT DIMENSIONS

Base unit excl. ground enclosure:

Length: 2.25 m
 Width: 2.75 m
 Maximum height: 2.40 m

* Without additional sections

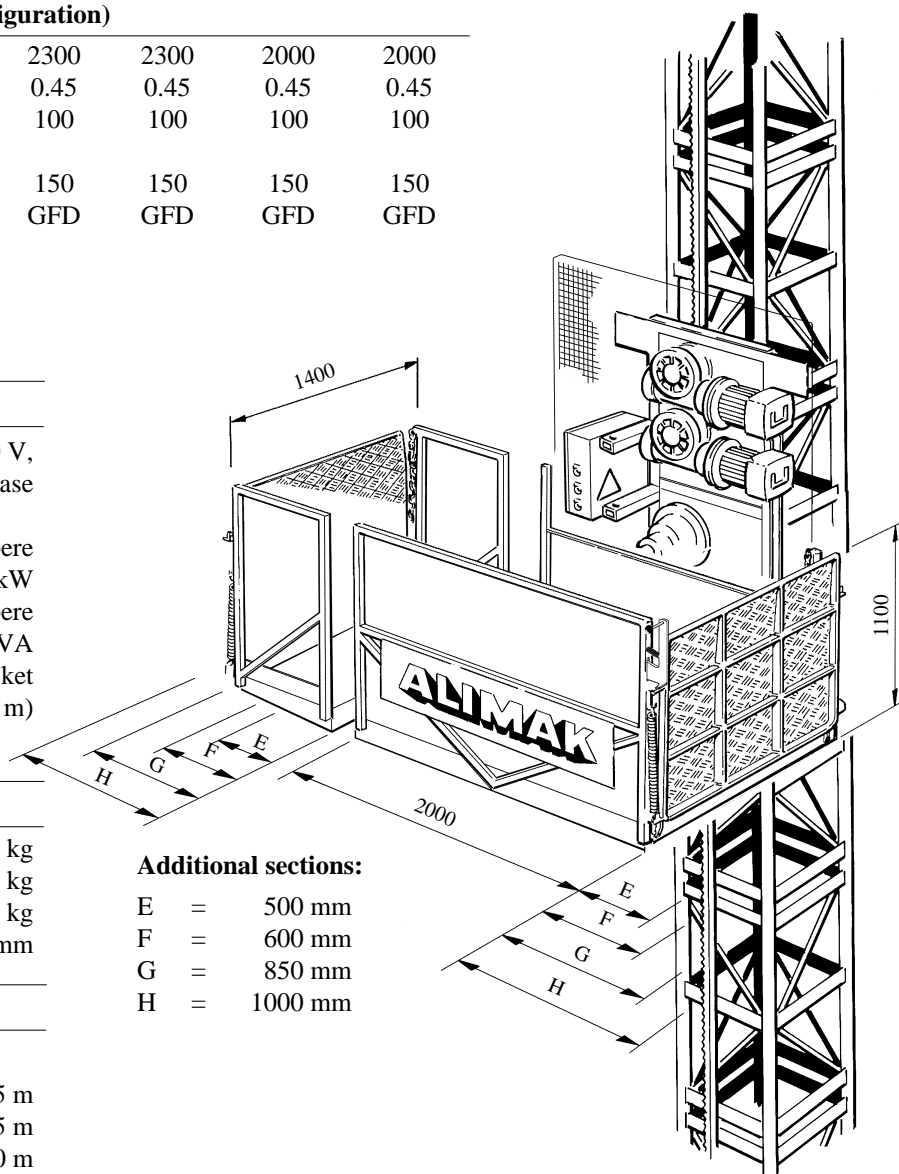



MEMBER OF THE ATLE KAROLIN GROUP

Alimak AB, P.O. Box 720, S-931 27 Skellefteå, Sweden.
Tel. +46 910 87000. Fax +46 910 56690.
E-mail: info@alimak.se Internet: <http://www.alimak.se>

Alimak have subsidiaries in: Great Britain, Germany, France, USA, Canada, Australia, Singapore, Brazil, Italy as well as in South Korea and, furthermore, 40 independent distributors around the world.

Pictures are illustrative only and do not necessarily show the configuration of products on the market at a given point in time. Products must be used in conformity with safe practice and applicable statutes, regulations, codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice.